


(HUSKY CONCEALED OVERHEAD CLOSER ONLY)

2'-6"	NO HOLD OPEN	37-624
	90° HOLD OPEN	37-625
	105° HOLD OPEN	37-626
3'-0"	NO HOLD OPEN	37-627
	90° HOLD OPEN	37-628
	105° HOLD OPEN	37-629
3'-6"	NO HOLD OPEN	37-630
	90° HOLD OPEN	37-631
	105° HOLD OPEN	37-632
4'-0"	NO HOLD OPEN	37-633
	90° HOLD OPEN	37-634
	105° HOLD OPEN	37-635

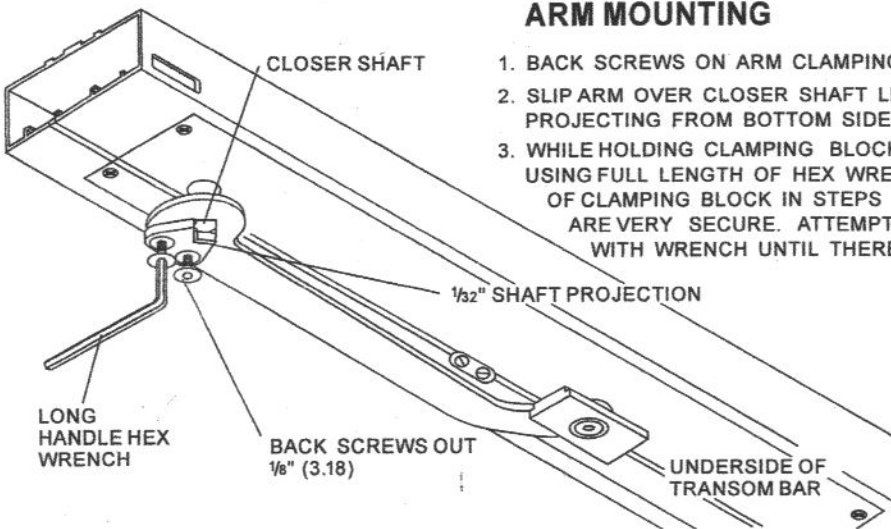

ARM MOUNTING


1. BACK SCREWS ON ARM CLAMPING BLOCK OUT APPROX. $\frac{1}{8}$ "
2. SLIP ARM OVER CLOSER SHAFT LEAVING APPROX. $\frac{1}{32}$ " OF SHAFT PROJECTING FROM BOTTOM SIDE OF ARM.
3. WHILE HOLDING CLAMPING BLOCK TIGHT AGAINST ARM AND USING FULL LENGTH OF HEX WRENCH TIGHTEN SCREWS OF CLAMPING BLOCK IN STEPS (ONE AT A TIME) UNTIL BOTH ARE VERY SECURE. ATTEMPT TO OVERTIGHTEN SCREWS WITH WRENCH UNTIL THERE IS NO MOVEMENT AT ALL.

IN-CC-PO-N


REFER TO **HARDWARE SECTION** FOR COMPLETE HARDWARE INFORMATION.

ARCHITECTS CLASSIC (PUSH PULL SETS)

SINGLE ACTING DOORS USE A PULL HANDLE AND PUSH BAR AS STANDARD
 DOUBLE ACTING DOORS USE CP PUSH BARS BACK TO BACK AS STANDARD.

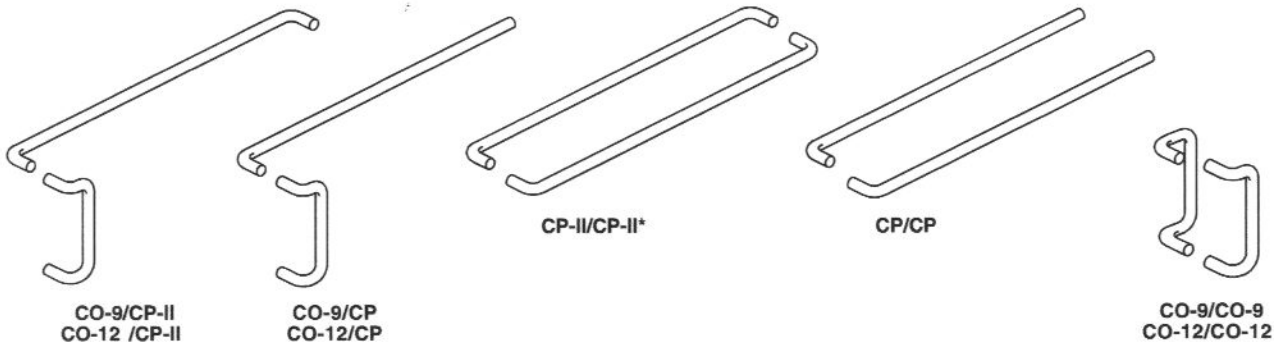


ARCHITECTS CLASSIC (COMPONENTS)

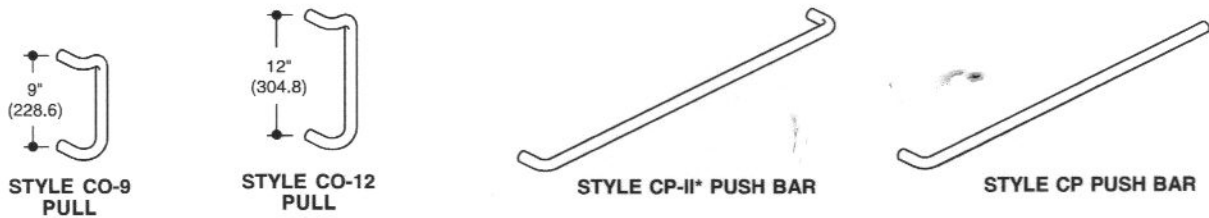


* CP-II PUSH BAR IS NOT TO BE USED FOR BACK TO BACK MOUNTING ON D/A DOORS.

EXIT DEVICES

KAWNEER PANELINE® / PANELINE® EL




STYLE "CPN" PULL ON EXTERIOR OF DOOR

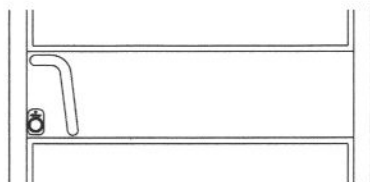


EXTERIOR VIEW OF 190 DOOR (350/500 SIMILAR)
 "CPN" PULL AND OPTIONAL CYLINDER GUARD SHOWN.

SEE PAGE 11 FOR COMPLETE PANELINE® INFORMATION


PANICS AND PULLS



STYLE "CO-9" PULL




STYLE "CO-12" PULL



RIM LATCH
 Dor-O-Matic 2090



CONCEALED ROD
 Dor-O-Matic 1990



CONCEALED ROD
 Dor-O-Matic 1690
 Dor-O-Matic EL 1690



RIM LATCH
 Dor-O-Matic 1790
 Dor-O-Matic EL 1790




CONCEALED ROD
 Dor-O-Matic 1490



RIM LATCH
 Dor-O-Matic 1590

Laws and building and safety codes governing the design and use of glazed entrance, window, and curtain wall products vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.
 © Kawneer Company, Inc., 2006

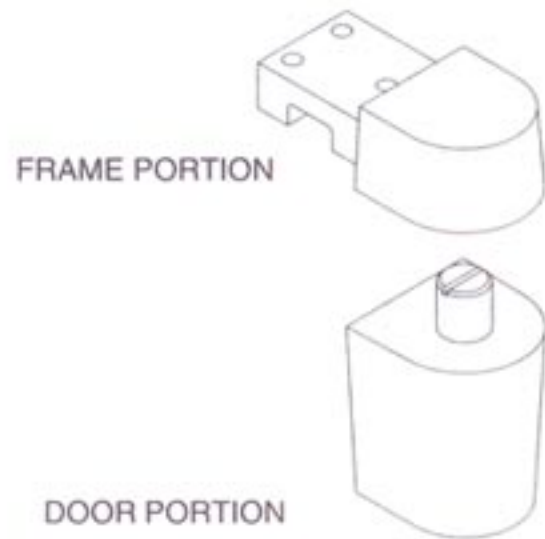


TOP OFFSET PIVOT

Description: Both the door and frame portion of the pivot assembly are of cast aluminum. Press fitted into the frame portion is a heavy wall oilite bronze self-lubricating bearing. A stainless steel pivot pin in the door portion completes the assembly.

Application: The frame portion is mortised into the header/transom bar and is attached with screws threaded into the pivot block. The pivot attachment location takes advantage of the strength at the frame joint. The door portion has two bosses which interlock in the door extrusion, to prevent rotation. It is secured in place with two screws through a reinforcing plate which spreads the load. The spring loaded pivot pin allows easy "one man" installation.

Finish: Standard finish is a thermosetting polyester powder coated finish applied to match anodized finishes of #17 Clear, #40 Bronze and #29 Black. Other finishes available upon request. Contact the factory.

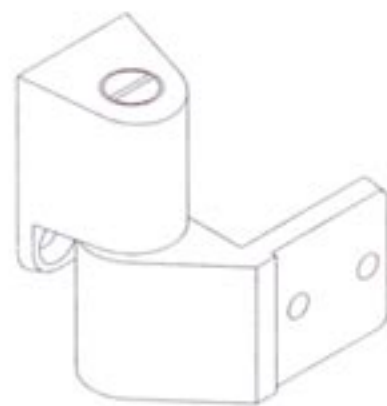


PATENT NO. 4,937,916

STANDARD INTERMEDIATE PIVOT

Description: This aluminum die cast pivot is adjustable and load bearing with the extra benefit of being non handed. The door portion is surface applied with two screws and intragral interlocking boss which resist both rotational and thrust loads. The frame portion is mortised into the frame with just two screws for attachment. The pivot pin is stainless steel which works within a heavy wall, self lubricated oilite bearing. It is also available in electric transfer model.

Application: This pivot is used in conjunction with top and bottom offset pivots for additional strength and door/frame alignment. Use of this pivot is advised on doors experiencing high traffic volume or on doors exceeding 7'-6" (2286) in height. **(not for top pivot replacement)**

Finish: Standard finish is a thermosetting polyester powder coated finish applied to match anodized finishes of #17 Clear, #40 Bronze and #29 Black. Other finishes available upon request. Contact the factory.

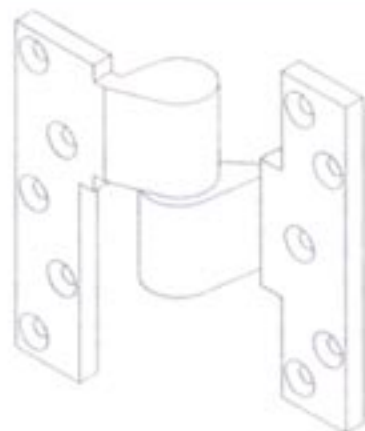


OPTIONAL INTERMEDIATE OFFSET PIVOT

Description: This aluminum pivot is fully mortised into the door and frame and has a 3/4 inch (19.1) offset from the door face. The thrust bearing is corrosion resistant and self lubricating. The pivot pin is hardened Parco-lubricated steel.

Application: This pivot is used in conjunction with top and bottom offset pivots for additional strength and door/frame alignment. Use of this pivot is advised on doors experiencing high traffic volume or on doors exceeding 7'-6" (2286) in height.

Finish: A baked epoxy finish is applied to match anodized finishes of #17 Clear and #40 Bronze.

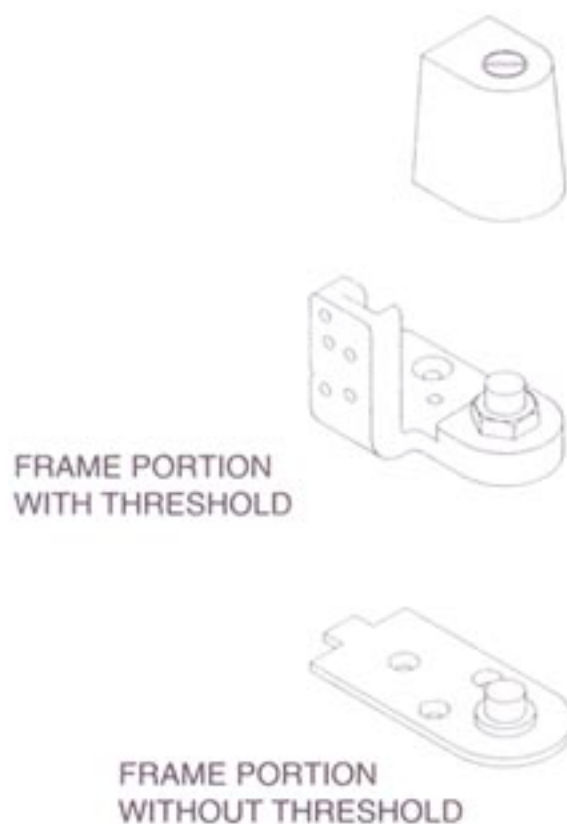

BOTTOM OFFSET PIVOT

Description: Door Portion - is of cast aluminum. Attachment is obtained by back bolting through a plated steel reinforcing plate, the door stile extrusion and threading into the pivot block. A ball-bearing raceway accepts the pivot pin. The door portion provides vertical screw adjustment to achieve proper door, frame, and threshold clearance.

Frame Portion -(with threshold) the pivot base is of cast aluminum with a steel pivot pin. This pivot portion becomes an integral part of the door frame and securely anchors the frame and threshold to the floor.


Floor Portion - (without threshold) the pivot plate is stainless steel with a riveted stainless pivot pin. The plate is fastened at three points directly to the floor.

Application: The bottom offset pivot is used in conjunction with the top, and optional intermediate offset pivot. The frame portion is used with threshold. On interior or vestibule door not requiring threshold the floor mounted portion is used. The door portion provides vertical adjustment with both pivot pieces.

Finish: Standard finish is a thermosetting polyester powder coated finish applied to match anodized finishes of #17 Clear, #40 Bronze and #29 Black. Other finishes available upon request. Contact the factory. The floor portion is a clear finish to match the threshold or stainless steel door without threshold.

HARDWARE

PIVOTS/HINGES

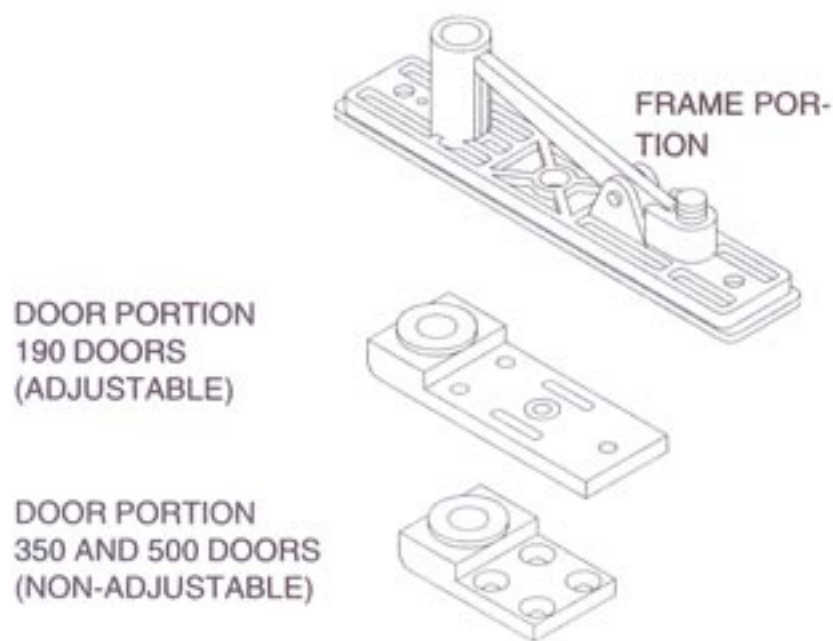


TOP CENTER PIVOT

Description: (Frame Portion)- The "walking beam" frame pivot portion is cast aluminum with a hardened steel pivot pin. The pin is adjustable for additional extension through the transom bar/header. Both door pivot portions are machined aluminum with oilite bronze self-lubricating bearings. All top center hung pivot parts are concealed.

Application: This pivot assembly is used in conjunction with center hung doors with floor closers. The adjustable portion for the 190 Narrow Stile Door provides for a one time only adjustment. Dimension 3" (76.2) long, 1-7/16" (36.5) wide, and 1/2" (12.7) at its thickest point. The 350 Medium Stile and 500 Wide Stile door pivot portion is non-adjustable. Dimensions 2-3/8" (60.3) long, 1-7/16" (35.5) wide and 1/2" (12.7) at its thickest point.

Finish: The frame portion is natural cast aluminum with dress plate to match color of frame. The machined door portion is mill finish.

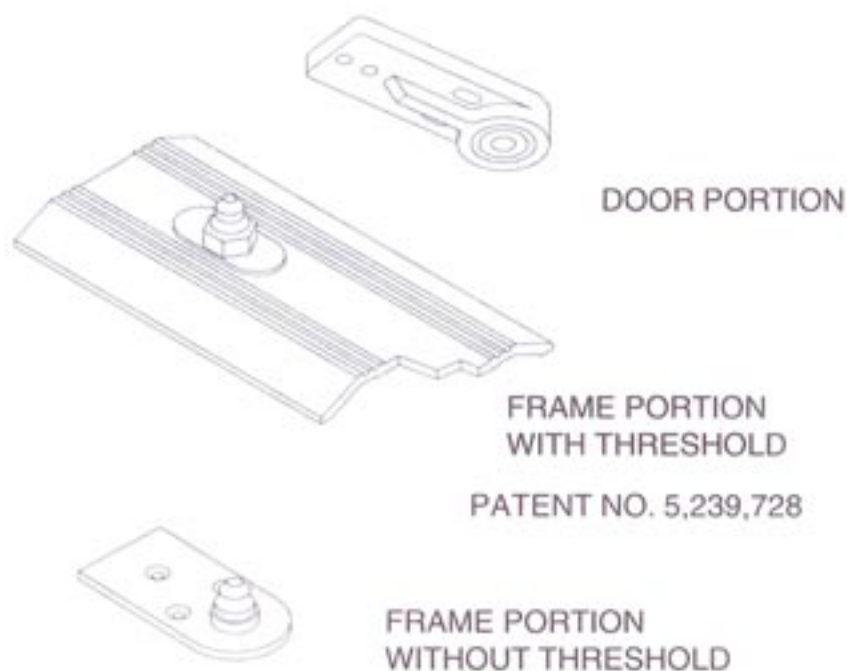


BOTTOM CENTER PIVOT

Description: The low profile center pivot for use with a threshold has an adjustable stainless steel pivot pin that is mounted and locked into the threshold. The center pivot for use without a threshold has a stainless steel pivot pin press fit into a stainless steel plate. The door portion is comprised of a roller bearing press fit into a cast aluminum pivot block.

Application: Both pivot portions, with or without threshold, are used on doors with concealed overhead closer control. On entrances with thresholds the pivot is anchored securely into the threshold. The frame portion is adjustable for proper door and frame clearance. The frame portion for use on doors without threshold is fastened directly to the floor. When no threshold is used, height adjustment is obtained by shimming the pivot block. The door pivot block is securely mounted to the bottom rail web.

Finish: Mill finish is standard for all bottom center pivot parts.

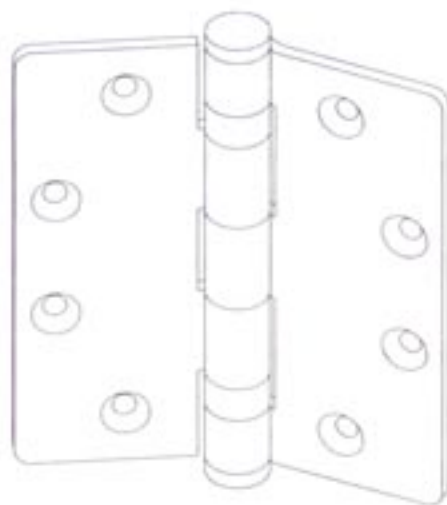


BUTT HINGE

Description: Commercial quality steel or brass hinge with leafs of five knuckle-two ball bearing construction. The hinge barrel is enclosed with button tips and incorporates a non-rising removable pin. Butt hinges with optional non-removable pin are available. The hinge is a radius corner, standard template butt of 4-1/2" x 4" (114.3 x 101.6). The hinge leaf thickness is .134 inches (3.4). It is also available in electric transfer model.

Application: The butt hinge is fully mortised into the door hinge stile and frame hinge jamb. Reinforcing plates are used in both the frame jamb and hinge stile for secure screw anchorage. Butt hinges for corrosive coastal environments also available. The use of an intermediate butt (1-1/2 pair per leaf) is suggested for doors in high traffic areas or for doors over 7'-6" (2286).

Finish: On clear anodized doors the hinge finish is U.S. 26D dull chrome. On Permanodic bronze or black doors the hinge has a dark oxidized finish.

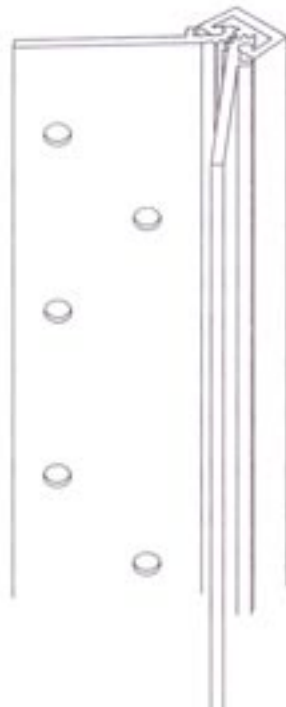

CONTINUOUS HINGE

Description: Quality continuous "geared" hinge incorporating lubricated bearings between the knuckles.

Application: The continuous hinge is surface applied to both the door stile and door frame. Screws are staggered and are approximately 6" (152.4) on center. Continuous hinges are suitable for all entrance configurations.


Finish: Available in #14 Clear, #29 Black and #40 Bronze anodized finishes. Painted finishes are available on a custom basis.

HARDWARE

1070 HARDWARE




RECESSED HEAD GUIDE

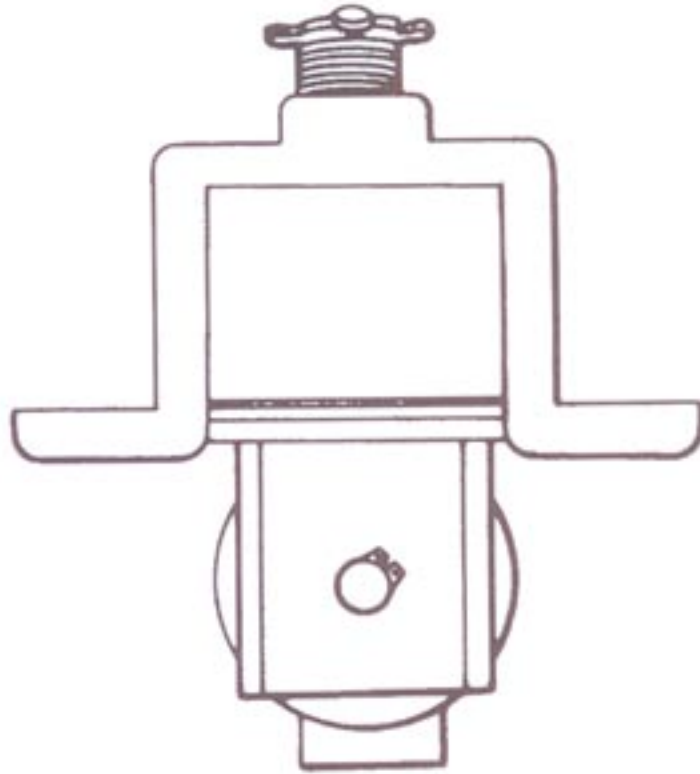

INBOARD CASTER





RECESSED CASTER

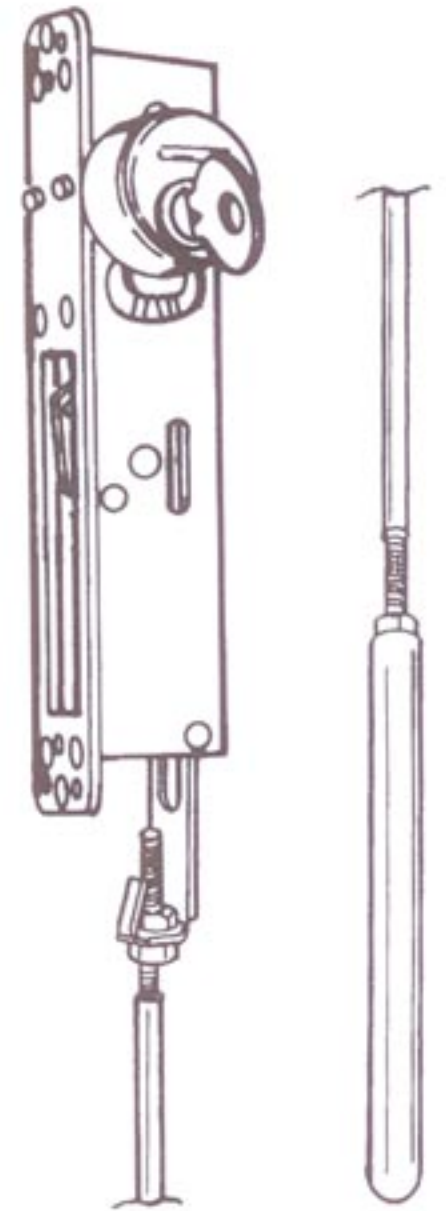



MS 1873 LOCK

SWINGING ENTRANCE DOOR PUSH/PULL HARDWARE

REFER TO HARDWARE SECTION FOR ADDITIONAL INFORMATION.

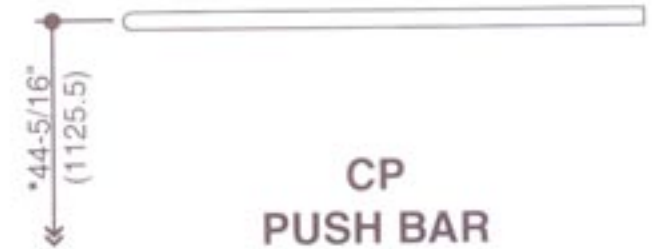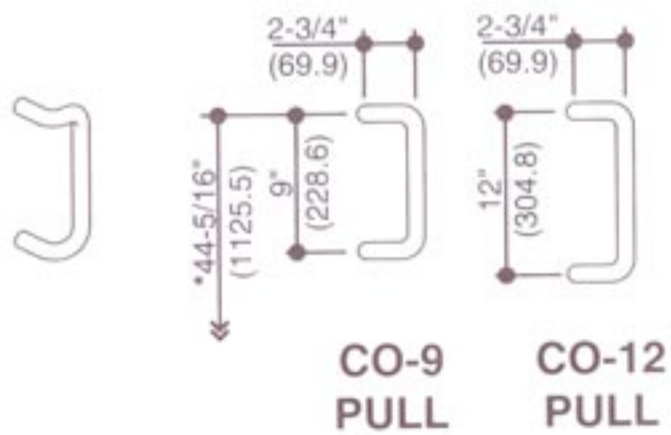

NOTE: * DIMENSIONS ARE FROM BOTTOM OF DOOR TO ATTACHMENT POINT.

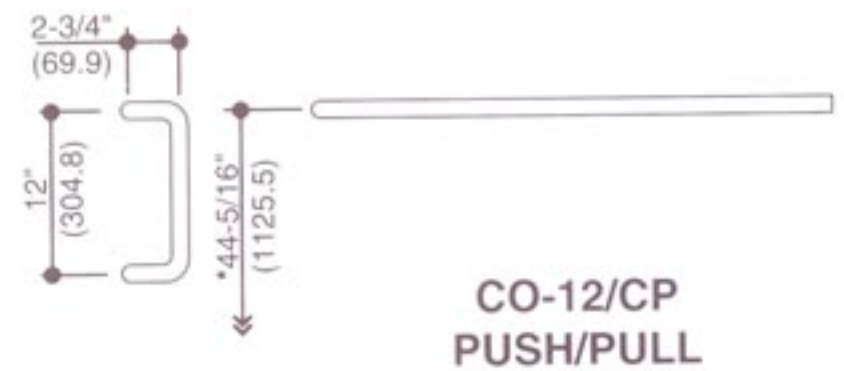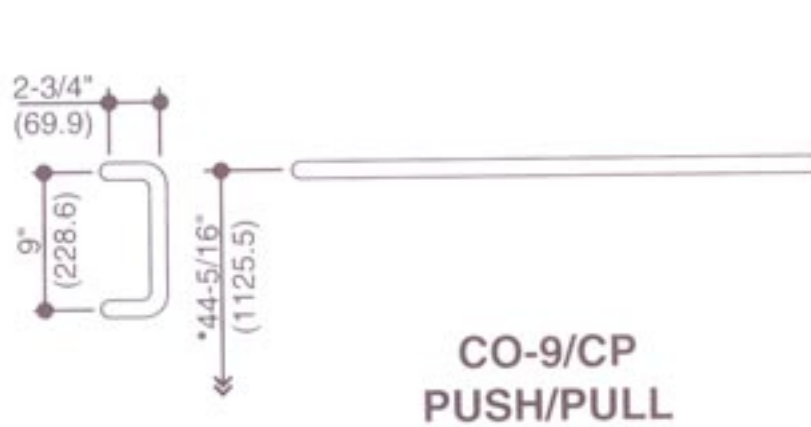

FINISHES: Architect's Classic Push/Pull Hardware are available in the following finishes:
 #14 Clear, #29 Black and #40 Dark Bronze Anodized.
 #44 Bronze - US10B oil rubbed, 45 Stainless Steel - US32 polished, #46 Stainless Steel - US32D dull
 and #47 Bright Brass (PVD) - US3.